

OSTAS COMFORT-Series

Hydraulic press brakes

Price on request

AVAILABLE





Specifications

Category	Hydraulic press brakes
Brand	OSTAS
Type / model	COMFORT-Series
Condition	New
Capacity	See photo
Status	Available

Description

- 4 Axis CNC controlled Y1, Y2, X, R
- Cybelelec touch 15 ps (2d graphics) 15 Inch touch screen CNC control unit
- Laser safety system for front (finger protection) and rear of the machine
- Side doors for safety and cylinder covering
- 2x Sliding plate support arm system
- Tool set

Photos

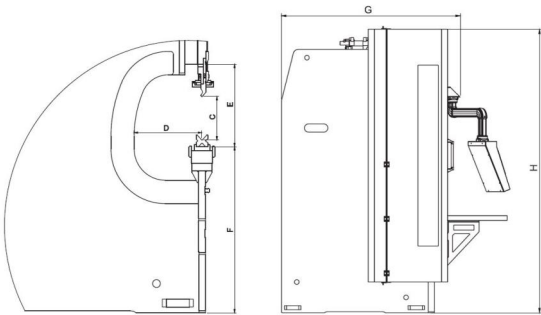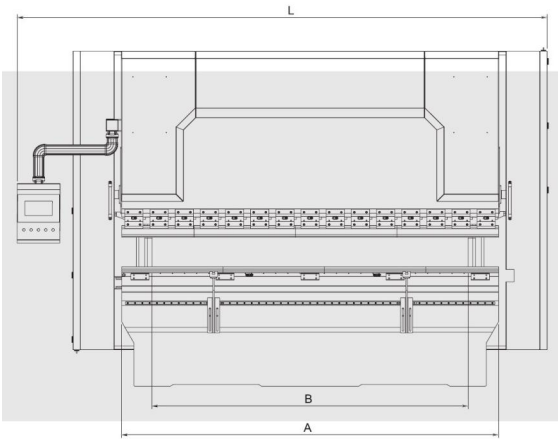

MODEL	Working Area Ton	Total Length		Distance Between Columns		Stroke	Between Tables		Table Height	Speeds		Machine Size (in maximum state)		Back Rest Distance mm	Cut Angle deg	Noise eq. (dB)	
		A	B	C	D		E	F		Recast Speed	Stroke Speed	Length-Width (L x B) mm					X Axis
		mm	mm	mm	mm		mm	mm		mm/s	mm/s	mm	mm				kg
COMFORT 40	40	1300	1100	265	410	470	820	160	130	10	2965	1485	2460	750	130	3400 5.5	
	40	1600	1300	265	410	470	820	160	130	10	2985	1485	2460	750	130	4000 5.5	
	60	1600	1300	265	410	470	850	160	130	10	3000	1530	2520	750	130	4000 7.5	
COMFORT 60	60	2100	1600	265	410	470	850	170	145	10	3455	1630	2520	750	130	4400 7.5	
	60	2600	2100	265	410	470	850	170	145	10	3960	1630	2550	750	130	4900 7.5	
	100	2100	1600	265	410	470	840	210	145	10	3470	1785	2600	750	130	5500 7.5	
COMFORT 100	100	2600	2100	265	410	470	870	210	145	10	3970	1795	2630	750	130	6250 7.5	
	100	3100	2600	265	410	470	880	210	145	10	4320	1795	2630	750	170	6800 7.5	
	135	3100	2600	265	410	470	925	220	140	10	4360	1745	2760	750	170	7600 11	
COMFORT 135	135	3600	3200	265	410	470	925	220	140	10	4965	1745	2760	750	170	8200 11	
	135	4100	3600	265	410	470	925	220	140	10	5500	1845	2760	750	170	10000 11	
	175	3100	2600	265	410	470	925	190	140	10	4350	1835	2770	750	180	8700 15	
COMFORT 175	175	3600	3200	265	410	470	925	190	140	10	4880	1835	2770	750	180	10700 15	
	175	4100	3600	265	410	470	925	190	140	10	5320	1835	2790	750	180	11250 15	
	220	3100	2600	265	410	470	925	190	150	10	4380	1770	2750	750	200	10200 18	
COMFORT 220	220	3600	3200	265	410	470	940	190	150	10	5010	1770	2795	750	200	12200 18	
	220	4100	3600	265	410	470	940	190	150	10	5480	1870	2785	750	200	12900 18	
	270	3100	2600	265	410	470	1010	150	150	10	5950	1950	3020	750	200	17800 18	
COMFORT 270	270	3600	3200	265	410	470	1040	150	150	10	6600	2030	3150	750	220	22100 18	
	270	4100	3600	265	410	470	980	160	130	10	4450	1910	2620	750	225	12100 22	
	320	3100	2600	265	410	470	980	160	130	10	5100	1910	2620	750	225	13700 22	
COMFORT 320	320	3600	3200	265	410	470	980	160	130	10	5550	1910	2940	750	225	14500 22	
	320	4100	3600	265	410	490	980	160	120	10	4410	1900	2960	750	270	13500 22	
	320	5100	4200	265	410	490	980	160	120	10	5025	1900	2965	750	270	14700 22	
COMFORT 320	320	6100	5100	265	410	490	1010	160	120	10	6010	1980	3135	750	270	20400 22	
	320	7100	6100	265	410	490	1040	160	120	10	6920	1980	3365	750	270	24500 22	

